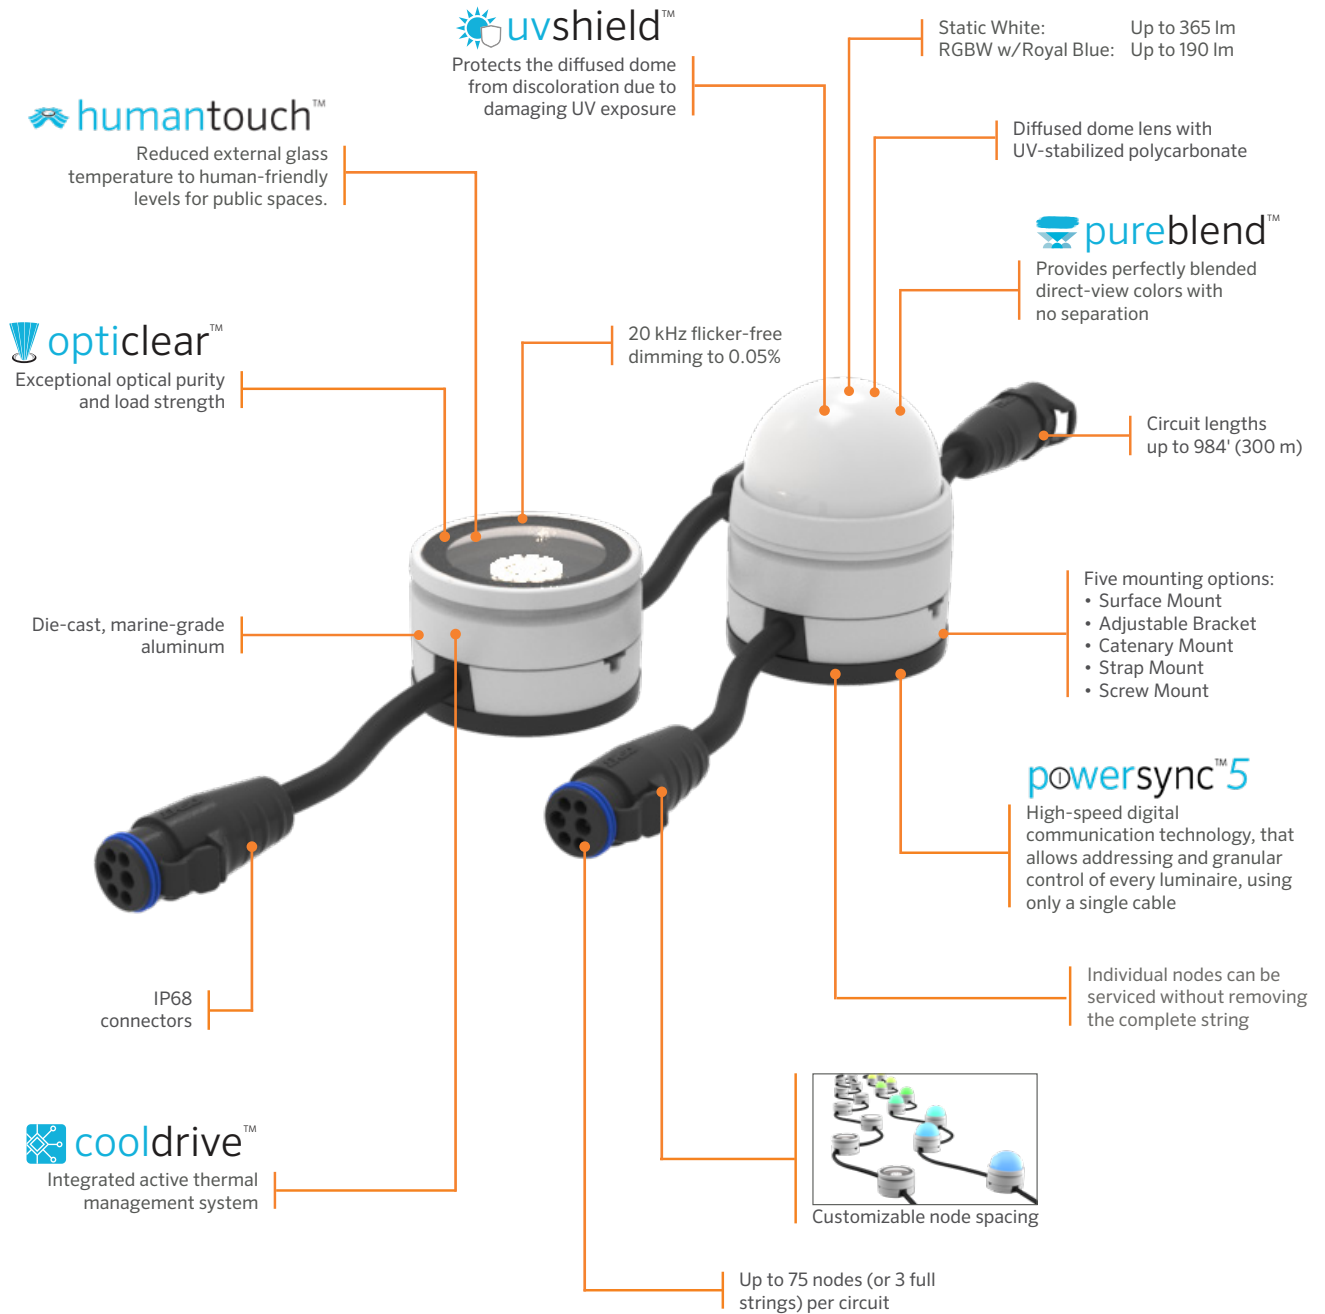# FAISCA F3

An intelligent, high-powered direct-view Architectural Marker Light for a range of lighting applications.

uvshield™
Protects the diffused dome from discoloration due to damaging UV exposure

humantouch™
Reduced external glass temperature to human-friendly levels for public spaces.

Static White: Up to 365 lm
RGBW w/Royal Blue: Up to 190 lm

Diffused dome lens with UV-stabilized polycarbonate

pureblend™
Provides perfectly blended direct-view colors with no separation

opticlear™
Exceptional optical purity and load strength

20 kHz flicker-free dimming to 0.05%

Circuit lengths up to 984' (300 m)

Die-cast, marine-grade aluminum

Five mounting options:
• Surface Mount
• Adjustable Bracket
• Catenary Mount
• Strap Mount
• Screw Mount

powersync™5
High-speed digital communication technology, that allows addressing and granular control of every luminaire, using only a single cable

IP68 connectors

Individual nodes can be serviced without removing the complete string

cooldrive™
Integrated active thermal management system

Customizable node spacing

Up to 75 nodes (or 3 full strings) per circuit

Available in RGBW, RGBA, Tunable White and a wide selection of white color temperatures.

| Surface Mount | Adjustable Bracket | Catenary Mount | Strap Mount (Strap Not Included) | Screw Mount |

ARCHITECTURAL & FACADE LIGHTING
Learn more. Visit lumascape.com

LUMASCAPE